

EZ PAINT MIXING ROOM

- EZ TO INSTALL
- EZ TO OPERATE
- EZ TO MAINTAIN
- EZ TO QUICK SHIP

SHOWN WITH
OPTIONAL POWDER COATING




- Control panel and other electric components can be purchased separately
- ETL listed when optional control panel is added



- Industry-leading light levels
- Spray booth specific, dual voltage T-8 32-watt light fixtures
- Quality brand-name tubeaxial fans and motors



- Personnel access doors are pre-hung in a heavy gauge galvanized steel frame for easy installation.



- Constructed from 18 gauge, prime-quality steel
- All panels and support members are precision punched for easy nut and bolt assembly
- 5/16" bolt with self locking nuts


OVERVIEW

Air flows in through the filtered air intake panel (located in the ceiling toward one end of the room), downward through the work area, and into the exhaust chamber located in the lower opposite end of the room. Filtered exhaust air is drawn through the exhaust plenum and is discharged upward into the atmosphere through the exhaust stack.

LIGHTING FEATURES

Bright, full room illumination is provided by 48" four-tube, 32-watt clear, fluorescent light fixtures in the ceiling panels. Each is sealed behind clear, tempered safety glass. All fixtures are UL listed and approved for their intended use and placement.

EZ PAINT MIXING ROOM

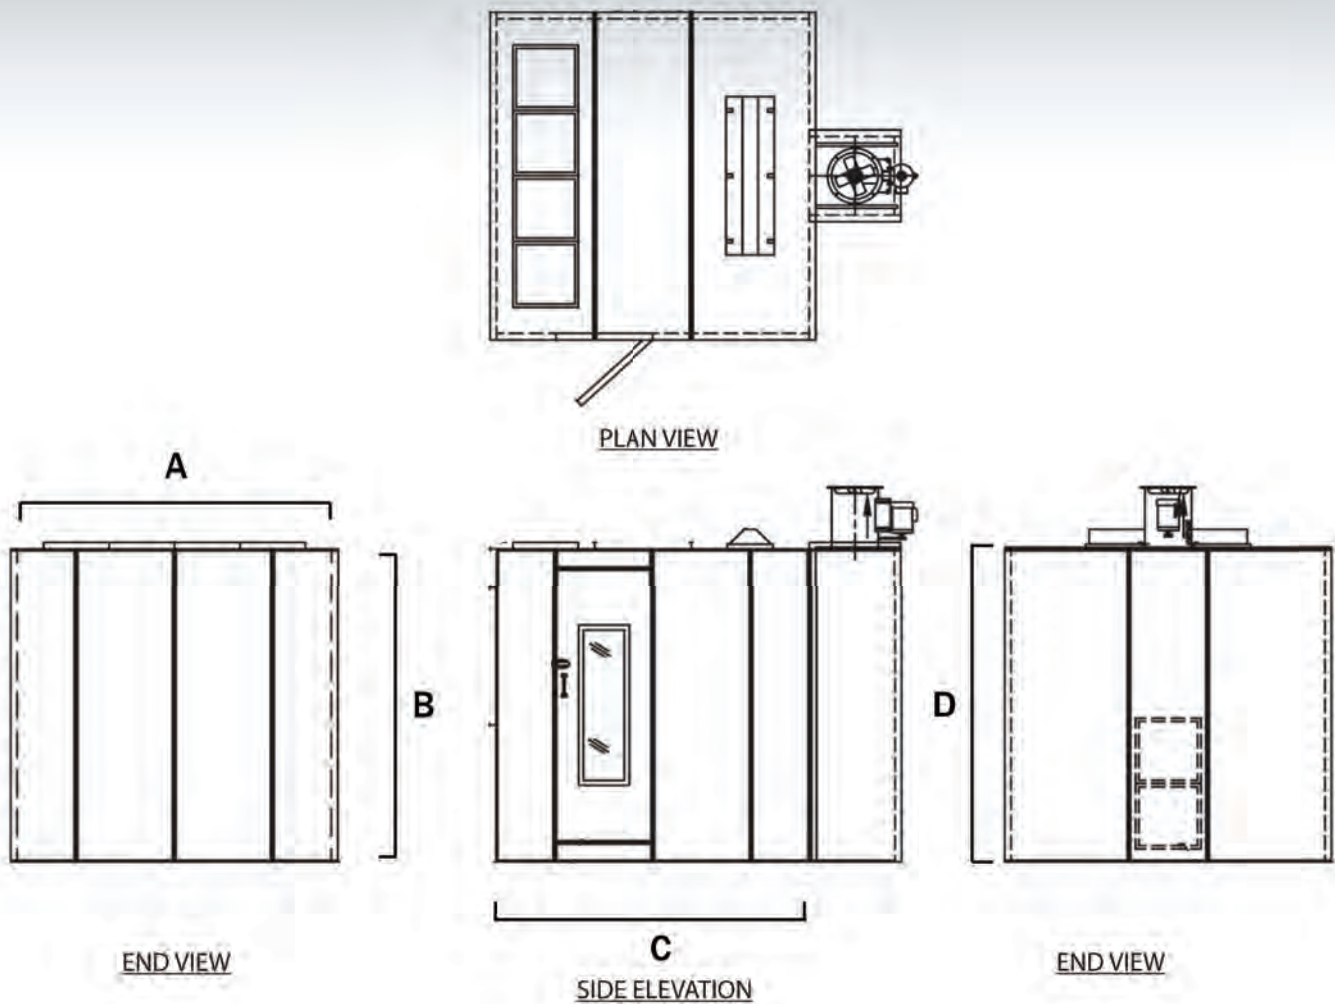

Model Number	Interior Dimensions			Exterior Dimensions			Access Doors	Lights		Air Flow SCFM	Fan Spec.		Filters	
	Width	Height	Length	Width	Height	Length		Open	S&G		Dia.	HP	Int.	Exh.
PMR-08-08-08	8'-0"	8'-0"	8'-0"	8'-4"	8'-2"	10'-6"	1 with Window	1	0	1450	12"	¾ HP	4	2
PMR-08-08-10	8'-0"	8'-0"	10'-0"	8'-4"	8'-2"	12'-6"	1 with Window	1	1	1450	12"	¾ HP	4	2
PMR-08-08-12	8'-0"	8'-0"	12'-0"	8'-4"	8'-2"	14'-6"	1 with Window	1	1	1450	12"	¾ HP	4	2
PMR-08-08-15	8'-0"	8'-0"	15'-0"	8'-4"	8'-2"	17'-6"	1 with Window	2	1	1450	12"	¾ HP	4	2
PMR-10-08-15	10'-0"	8'-0"	15'-0"	10'-4"	8'-2"	17'-6"	1 with Window	2	1	1450	12"	¾ HP	4	2
Ref. Key	A	B	C		D									